

MEET THE GAME CHANGERS



Straight CTS to Meter



Angle CTS to Meter



Straight CTS to FI NPT



Straight UTC to Meter

FAST FIT CURB STOP METER VALVES

VALVES CAN
BE SECURELY LOCKED



10X FASTER TO FIT

Supplied ready to fit with no nut adjustment or stiffener required.



LONGER LASTING

The composite material avoids corrosion, ensuring a long service life.



SAFER

Composite construction means there is no leachate of heavy materials and it is completely free of lead.



ANTI-THEFT

Manufactured from durable composite materials the Philmac curb stop valve has no scrap value.



ROBUST AND EASY TO HANDLE

The composite material requires no special handling or care. Any type of wrench can be used.

The Philmac FAST FIT curb stop is the new composite metering valve offering a fast and effective connection every time. Additionally, the Philmac valve provides a long and corrosive free service life. Available in a full range of configurations to suit all applications.

CUT. INSERT. TIGHTEN

1



2



3



SAVES YOU TIME AND PROVIDES A RELIABLE CONNECTION, EVERYTIME




The connection you can trust.


MORE CONFIGURATIONS AND SIZES COMING SOON!!

Certified to NSF 61 - Conforms to AWWA C800 and AWWA C521 - Rated to 230 PSI

- Valve is non-directional and is water-tight with flow in either direction
- Valve and handle lugs to enable valve to be locked in closed position with either padlock or barrel lock
- Reinforced polyamide composite valve which is corrosion resistant
- Reinforced polyamide composite materials which are lead and contaminant free


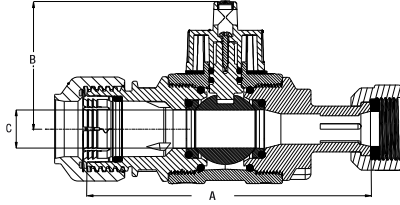


- Reinforced polyamide composite material to allow the use of any normal tightening wrench
- Compression gripping mechanism to ensure full tensile performance without the use of an internal pipe stiffener
- Compliant with the following meters - 5/8" x 3/4", 3/4" & 1"

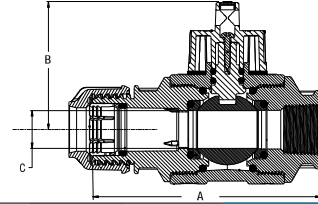

Product Number	CTS	FNPT	Dimensions			Price
			A	B	C	
76-091733	3/4"	3/4"	4.77"	2.7"	0.8"	\$97.61
76-091743	1"	3/4"	4.85"	2.7"	0.8"	\$100.45
76-091744	1"	1"	4.85"	2.7"	0.8"	\$105.95

Product Number	CTS	Meter	Dimensions			Price
			A	B	C	
76-091933	3/4"	3/4"	5.83"	2.7"	0.8"	\$100.71
76-091943	1"	3/4"	5.91"	2.7"	0.8"	\$104.64
76-091944	1"	1"	5.91"	2.7"	0.8"	\$110.36

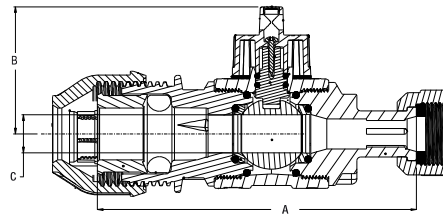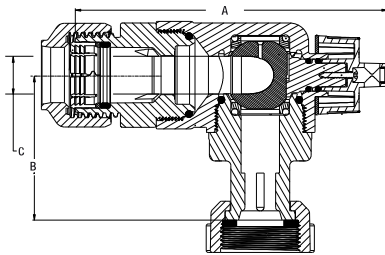

Product Number	UTC	Meter	Dimensions			Price
			A	B	C	
76-0969B3	0.83"-1.06"	3/4"	6.15"	2.7"	0.8"	\$120.81
76-0969C3	1.06"-1.34"	3/4"	6.42"	2.7"	0.8"	\$127.72
76-0969B4	0.83"-1.06"	1"	6.15"	2.7"	0.8"	\$125.58
76-0969C4	1.06"-1.34"	1"	6.15"	2.7"	0.8"	\$132.55

Product Number	CTS	Meter	Dimensions			Price
			A	B	C	
76-101933	3/4"	3/4"	6.43"	3.03"	0.8"	\$100.71
76-101943	1"	3/4"	6.51"	3.03"	0.8"	\$104.64
76-101944	1"	1"	6.51"	3.03"	0.8"	\$110.36

Caution: When removing valve from package, check to see if the meter nut washer seal is in place in the nut or loose in the package. If the seal is loose in the package, place it back in the meter nut before installation. If the seal is not loose in the package check to assure the seal is in the meter nut. Store valve in package until ready for use. Use only the supplied seal to assure joint performance. Do not use seals made by others.

FAST FIT CURB STOP - OPERATION & INSTALLATION INSTRUCTIONS

Philmac FAST FIT curb stop couldn't be faster or easier to install for a reliable connection, everytime.



1. Measure FAST FIT curb stop against the pipe and cut square.



2. Insert the pipe into the compression end of the valve and tighten by hand and nip up with a wrench.



3. Insert the washer into the meter end of the valve and tighten by hand and nip up with a wrench.

Distributed for Philmac by

Harco Fittings LLC - Web: harcofittings.com

3721 Cohen Place, Lynchburg, VA 24501

Email: customerservice@harcofittings.com - Phone 434-845-7094

Philmac PTY. LTD.

Email: export@phimac.com.au - Phone 61 8 8300 9200

www.philmacinc.com

47-59 Deeds Road, North Plympton, SA, Australia

FFCS_20231220